


OGD251



Photoelectric distance sensor

OGDLF8KG/IO-LINK/US

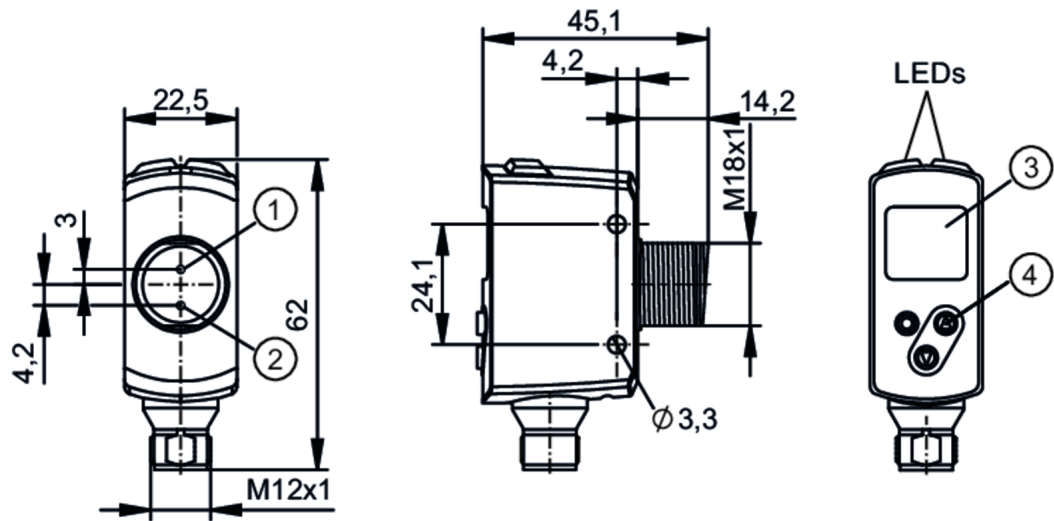

- 1 receiving element
- 2 transmitting element
- 3 alphanumeric display , 4-digit
- 4 programming buttons



Product characteristics

Type of light	red light
Laser protection class	1
Housing	rectangular with M18 thread

Electrical data

Operating voltage	[V]	18...30 DC; ("supply class 2" to cULus)
Current consumption	[mA]	45; (24 V)
Protection class		III
Reverse polarity protection		yes
Type of light		red light
Wave length	[nm]	650

Inputs / outputs

Number of inputs and outputs	Number of digital outputs: 2; Number of analogue outputs: 1
------------------------------	---

Inputs

Inputs	Laser On/ Off
--------	---------------

Outputs

Total number of outputs	2
Electrical design	PNP/NPN; (parameterisable)
Number of digital outputs	2
Output function	2 x normally open / normally closed; (parameterisable)
Max. current load per output	[mA] 100
Number of analogue outputs	1
Analogue current output	[mA] 4...20; (IEC 61131-2)



Photoelectric distance sensor

OGDLF8KG/IO-LINK/US

Max. load	[Ω]	250
Analogue voltage output	[V]	0...10; (IEC 61131-2)
Min. load resistance	[Ω]	5000
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes
Operating mode: FINE		
Switching frequency DC	[Hz]	20
Operating mode: STD		
Switching frequency DC	[Hz]	40
Operating mode: FAST		
Switching frequency DC	[Hz]	60
Detection zone		
Max. light spot diameter	[mm]	5
Light spot dimensions refer to		at maximum range
Background suppression	[m]	< 20
Measuring/setting range		
Setting range object reflectivity	[%]	6...900; (reflectivity; 6 % black paper; 100 % white paper)
Operating mode: FINE		
Measuring range	[m]	0.05...2
Sampling rate	[Hz]	60
Operating mode: STD		
Measuring range	[m]	0.05...2
Sampling rate	[Hz]	120
Operating mode: FAST		
Measuring range	[m]	0.05...1
Sampling rate	[Hz]	180
Software / programming		
Parameter setting options		Distance / reflectivity; hysteresis / window; Sensitivität; current/voltage output; Sequence modulation to avoid mutual interference by similar sensors
Interfaces		
Communication interface		IO-Link
Transmission type		COM2 (38,4 kBaud)
IO-Link revision		1.1.3
SDCI standard		IEC 61131-9
Profiles		Smart Sensor: Sensor Identification; Binary Data Channel; Process Value; Sensor Diagnosis
SIO mode		yes
Required master port type		A
Min. process cycle time	[ms]	5



Photoelectric distance sensor

OGDLF8KG/IO-LINK/US

IO-Link process data (cyclical)	function	bit length
	process value	2 x 16
	device status	4
	binary switching information	2
IO-Link functions (acyclical)	application specific tag; operating hours counter; switching cycles counter	
Supported DeviceIDs	Type of operation	DeviceID
	default	1582
Note	For further information please see the IODD PDF file under "Downloads"	

Operating conditions		
Ambient temperature	[°C]	-25...50
Note on ambient temperature		In ambient temperatures < -10 °C a warm-up time is necessary.
		Laser is off.
Storage temperature	[°C]	-30...80
Protection		IP 65; IP 67

Tests / approvals		
EMC	EN 60947-5-2	
Laser protection class		1
Notes on laser protection	Caution:	laser light
	laser class:	1
		EN / IEC60825-1:2007
		EN / IEC60825-1:2014
		Complies with 21 CFR 1040 except for deviations pursuant to Laser Notice No. 50, dated June 2007.
MTTF	[years]	258
UL approval	Ta	-25...60 °C
	Enclosure type	Type 1
	power supply	Class 2
	File number UL	E174191

Mechanical data		
Weight	[g]	53.4
Housing		rectangular with M18 thread
Dimensions	[mm]	61.7 x 22.5 x 45.2
Thread designation		M18 x 1
Materials		housing: PPSU; ABS; PMMA; PBT / PC; EPDM; front pane: PMMA
Lens alignment		side lens

Displays / operating elements		
Display	switching status	2 x LED, yellow
		1 x alphanumeric display, 4-digit
Operating elements	3	pushbutton

Accessories		
Items supplied		lock nuts: 2

Remarks		
Pack quantity		1 pcs.



Photoelectric distance sensor


OGDLF8KG/IO-LINK/US

Electrical connection

Connector: 1 x M12; coding: A



Connection

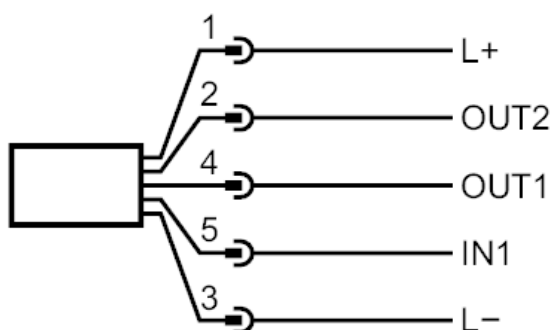

- 1: L+
 - 2: OUT2 switching output or analogue output
 - 3: L-
 - 4: OUT1 switching output or IO-Link
 - 5: IN Laser On/ Off
- For further information please see the operating instructions.



Photoelectric distance sensor

OGDLF8KG/IO-LINK/US

Other data		
Parameter	Setting range	Factory setting
SEL1	Dist / Refl	Dist
OU1	Hno, Hnc, Fno, Fnc.OFF	Hno
SP1 [mm]	50...2000	1000
SP1 [%]	6...900	10
nSP1 [mm]	50...2000	900
FSP1 [cm]	50...2000	1100
SF1 [mm]	10...500	50
bSP1 [%]	6...900	40
dSP1 [%]	6...900	30
SF1 [%]	1...100	10
dS1 [s]	0...0.1...5	0
dr1 [s]	0...0.1...5	0
SEL2	Dist / Refl	Dist
OU2	Hno, Hnc, Fno, Fnc, OFF	Hno
SP2 [cm]	50...2000	2000
SP2 [%]	6...900	6
ASP [mm]	0...2200	0
ASP [%]	0...999	0
AEP [mm]	0...2200	2000
AEP [%]	0...999	100
nSP2 [mm]	50...2000	1800
FSP2 [mm]	50...2000	2000
SF2 [mm]	10...500	50
bSP2 [%]	6...900	20
dSP2 [%]	6...900	10
SF2 [%]	1...100	10
dS2 [s]	0...0.01...5	0
dr2 [s]	0...0.01...5	0
dSO [s]	0...0.01...5	0.1
diS	On / OFF	On
colr	rEd; GrEn; r1ou; G1ou; r2ou; G2ou; r-12; G-ou	G1ou
P-n	PNP,NPN	PNP
OPEr (operating mode)	FINE,STD, FAST	FINE
SEQ	auto; S1...S5	auto

The values apply at	
Extraneous light on the object	< 10 klx
constant ambient conditions	23 °C / 960 hPa
minimum power-on time in minutes	15

Photoelectric distance sensor

OGDLF8KG/IO-LINK/US

Diagrams and graphs



- a: sensor
- b: object
- c: background
- x: distance sensor/object [mm]
- y: min. distance object/background [mm]

Hysteresis graph for distance measurement / operating mode:
FINE




- 1: Background any (6...90 % remission)
- 2: background white (90 % remission)



Photoelectric distance sensor

OGDLF8KG/IO-LINK/US

Hysteresis graph for distance
measurement / operating mode:
STD

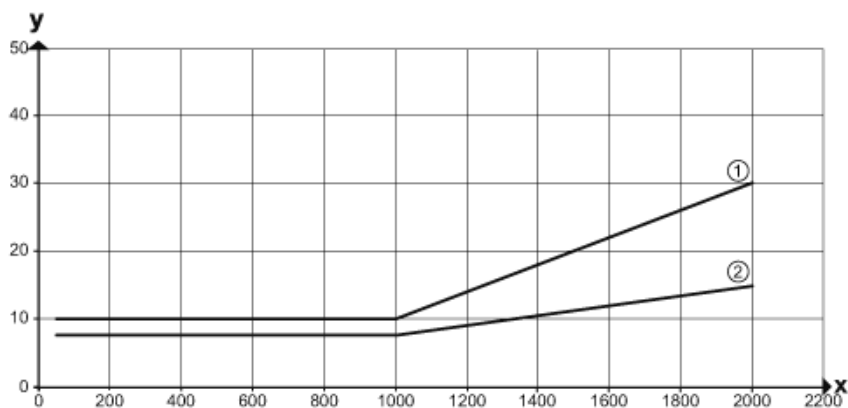

1: Background any (6...90 % remission)

2: background white (90 % remission)

Hysteresis graph for distance
measurement / operating mode:
FAST




1: Background any (6...90 % remission)

2: background white (90 % remission)

Photoelectric distance sensor

OGDLF8KG/IO-LINK/US

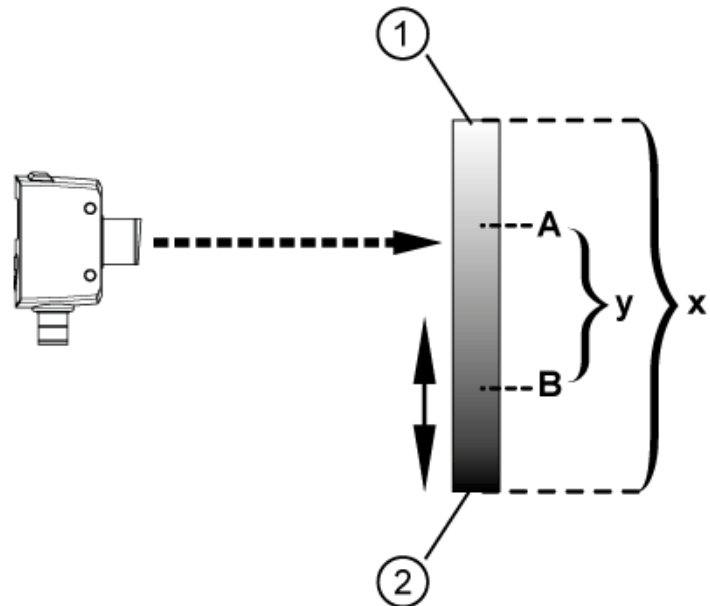

- 1: bright
- 2: dark
- A: switch point
- B: reset point
- x: object brightness (object reflectivity)
- y: min. reflectivity difference to be detected safely

hysteresis curve for object reflectivity

