


OVP810



Video processing unit (VPU)

OVPAAR0/E0/E1/TX2NX/4GB

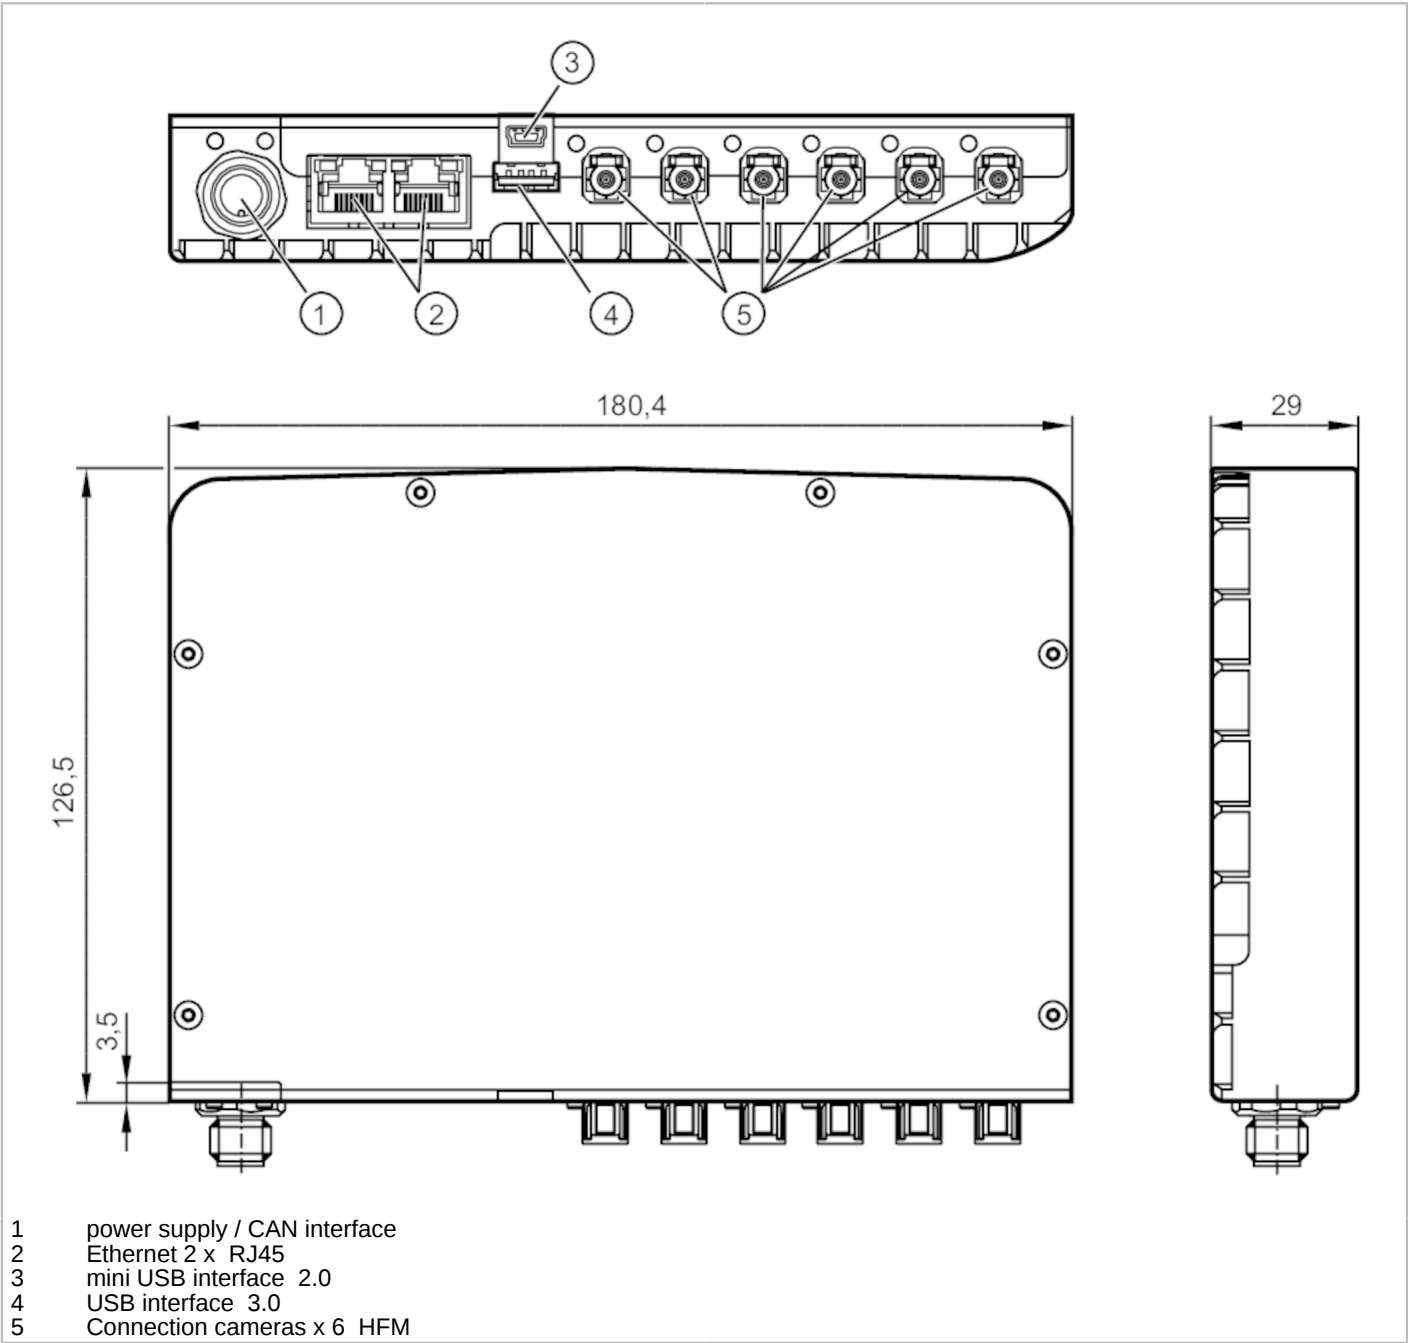

Application		
Application	Industrial imaging	
Electrical data		
Operating voltage	[V]	19.2...28.8 DC
Max. current consumption	[mA]	1100+n* (630/20) * FPS; n = number of cameras; FPS = camera frame rate
Power consumption	[W]	10,8 +(n* (9,36/20) *FPS; typical n = 3 ; the voltage and power supply are provided by the VPU and are therefore listed in the VPU data sheet.
Interfaces		
Number of CAN interfaces	1	

OVP810



Video processing unit (VPU)

OVPAAR0/E0/E1/TX2NX/4GB

Number of Ethernet interfaces	2	
Number of USB interfaces	2	
CAN		
Protocol	free protocol	
Ethernet		
Transmission standard	1GBase-T	
Transmission rate	1000 MBit/s	
Connector type	RJ45	
Protocol	TCP/IP	
Factory settings	IP address: 192.168.0.69	
	subnet mask: 255.255.255.0 (Class C)	
	gateway IP address: 192.168.0.201	
	MAC address: see type label	
Sensor interface		
Transmission standard	FPD-Link	
Connector type	HFM (Mini-FAKRA)	
Note on interfaces	maximum number of cameras: see operating instructions	
USB		
Connector type	Mini-USB; type A	
Version	2.0; 3.0	
Operating conditions		
Ambient temperature	[°C]	-10...40
Storage temperature	[°C]	-40...85
Protection	IP 50	
Tests / approvals		
EMC	EN IEC 61000-6-4	radiation of interference / residential, commercial and light-industrial environments
	EN IEC 61000-6-2	immunity / industrial environments
Shock resistance	DIN EN 60068-2-27	50 g / (11 ms) not repetitive
	DIN EN 60068-2-27	40 g / (6 ms) repetitive
Vibration resistance	DIN EN 60068-2-6	2 g / (10...150 Hz)
	DIN EN 60068-2-64	2.3 g RMS / (10...500 Hz)
Electrical protection	DIN EN 61010-2-201	electrical supply only via PELV circuits
Mechanical data		
Weight	[g]	1111
Dimensions	[mm]	126.5 x 29 x 180.4
Materials	housing: aluminium	
Tightening torque	[Nm]	< 5.5
Hardware		
Processor	SOM: Nvidia Jetson TX2NX 4GB Module CPU: Dual-Core NVIDIA Denver 2 64-Bit CPU and Quad-Core Arm® Cortex®-A57 MPCore processor; GPU: 256-core NVIDIA Pascal™ architecture GPU	
RAM	4GB 128-bit LPDDR4, 1600 MHz - 51.2 GB/s	
Mass storage	32GB eMMC 5.1 Flash (16GB for docker)	

OVP810




Video processing unit (VPU)

OVPAAR0/E0/E1/TX2NX/4GB

Remarks

Pack quantity	1 pcs.
---------------	--------


Electrical connection - Ethernet Connection



1	TX +
2	TX -
3	RX +
4	not used
5	not used
6	RX -
7	not used
8	not used

Electrical connection - USB socket

Connector: 1 x mini USB interface



Electrical connection - USB socket Typ A

Connector: 1 x Typ A



OVP810




Video processing unit (VPU)

OVPAA/R0/E0/E1/TX2NX/4GB

Electrical connection - power supply / CAN

Connector: 1 x M12; coding: A



1	screen
2	24 V
3	GND
4	CAN +
5	CAN -

Electrical connection - sensor interface

Connector: 6 x HFM (Mini-FAKRA) (AMK12A-1M4Z5-A)

Other data

Connection

	Port 0	Port 1	Port 2	Port 3	Port 4	Port 5
example 1	camera 1 (3D)	camera 2 (3D)	camera 1 (2D)	camera 2 (2D)	camera 3 (3D)	camera 4 (3D)
example 2	camera 1 (2D)	camera 2 (2D)	camera 1 (3D)	camera 2 (3D)	camera 3 (2D)	camera 4 (2D)
example 3	camera 1 (3D)	camera 2 (3D)	camera 3 (3D)	camera 4 (3D)	camera 5 (3D)	camera 6 (3D)
example 4	camera 1 (3D-VGA)	camera 2 (3D-VGA)	camera 3 (3D-VGA)	camera 4 (3D-VGA)	-	-

ports 0 and 1, 2 and 3, 4 and 5 must be assigned to the same type of image sensor.

please note the different 3D image sensor types 38k and VGA when connecting the cameras.

Remarks: Further information on the free memory required for specific applications can be found in the firmware-specific version information (ifm.3d.com).